


- NOTES:**
1. TREE PIT SHALL NOT BE LESS THAN (3) TIMES ROOT BALL DIA.
  2. CUT ALL TIES AND FOLD BACK BURLAP FROM UPPER 1/3 OF ROOTBALL.
  3. REMOVE ALL PLASTIC AND TWINE.
  4. WATER THOROUGHLY AFTER PLANTING TREE STAKES PERPENDICULAR TO PREVAILING WIND.
  5. PLANT TREES 1" HIGHER THAN DEPTH GROWN IN NURSERY.
  6. REMOVE TREE STAKING AFTER ONE YEAR.
  7. FOR RECOMMENDED TREE SPECIES REFER TO LANDSCAPE STANDARDS IN THE MEEKER STREET STREETScape DESIGN DOCUMENT.

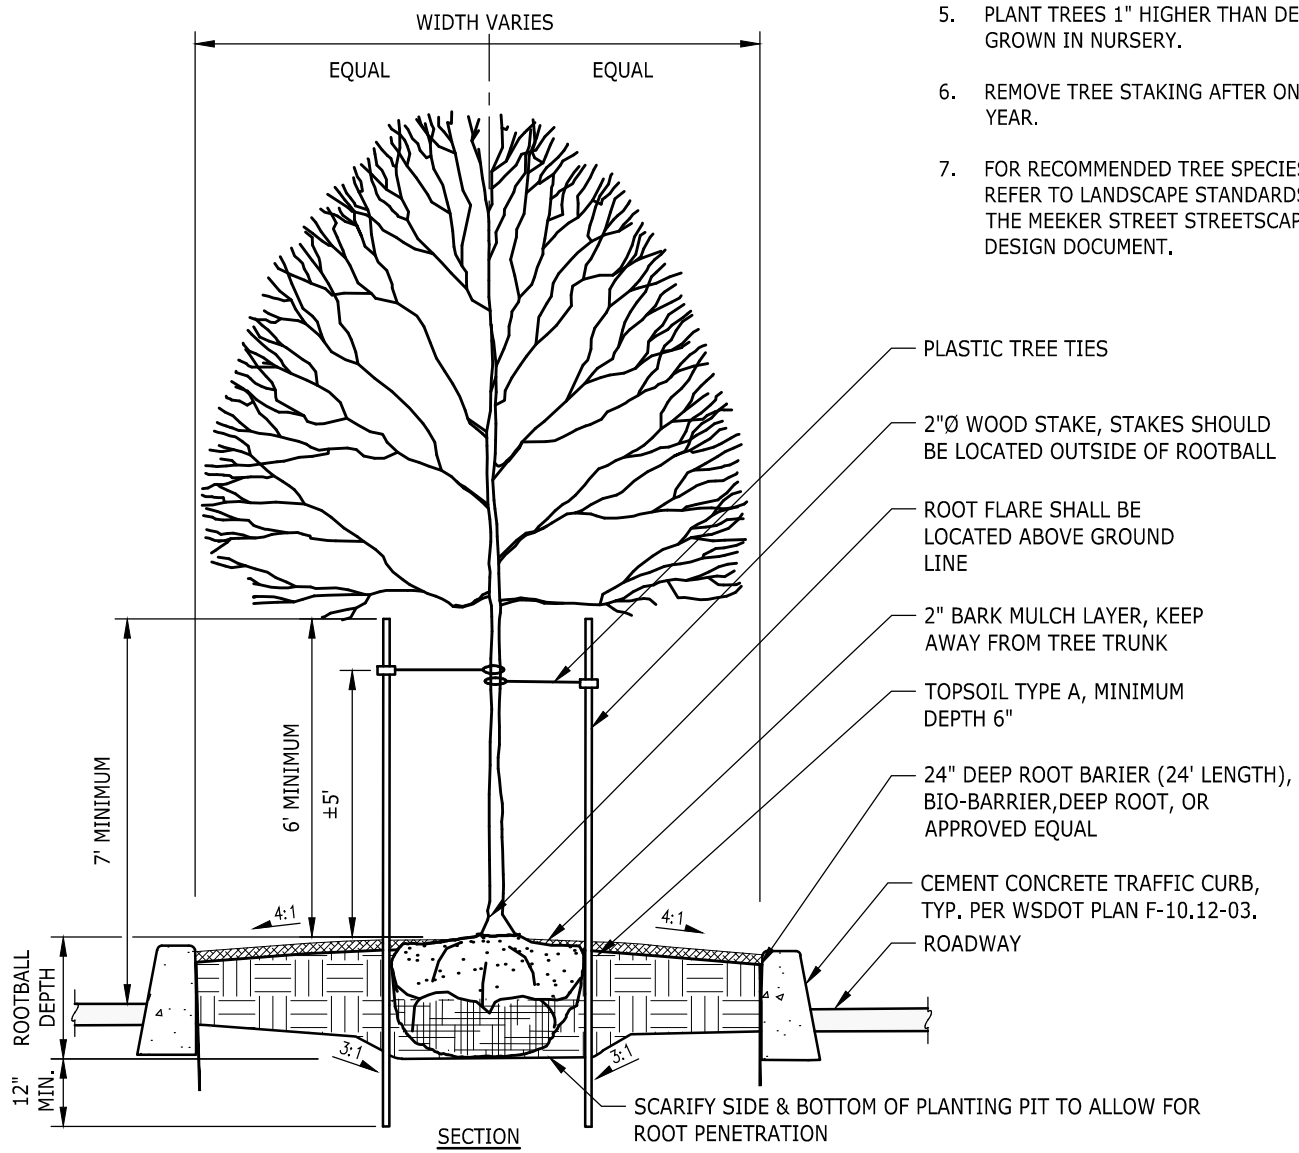

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE. THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION IS KEPT ON FILE AT THE CITY OF KENT. A COPY MAY BE OBTAINED UPON REQUEST.

		<b>CITY OF KENT</b> ENGINEERING DEPARTMENT	
		<b>MEEKER STREET CENTER MEDIAN TREE PLANTING</b>	
DESIGNED <u>COK</u>	SCALE <u>NONE</u>	STANDARD PLAN	
DRAWN <u>COK</u>	DATE <u>8/2020</u>	<b>7-32</b>	
CHECKED <u>COK</u>	ENGINEER		
APPROVED _____			