


SECTION A-A

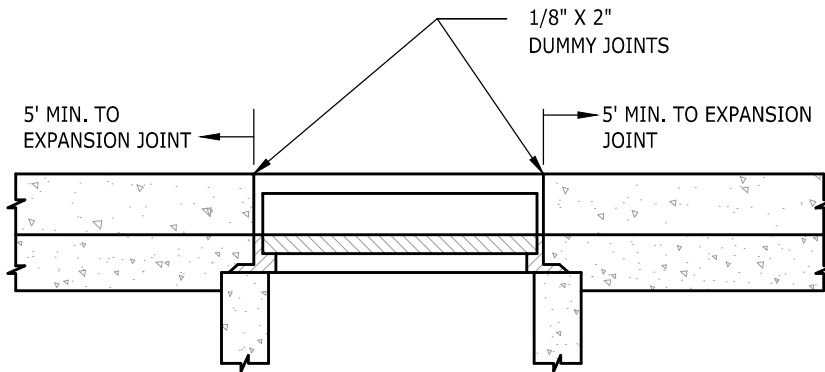


SECTION B-B

NOTES:

1. FOR INSTALLATIONS AT LOW POINTS USE 2-WAY VANED GRATE. OTHERWISE, USE STANDARD VANED GRATE.
2. CURB AND GUTTER 5' EITHER SIDE OF CATCH BASIN SHALL BE POURED AT THE TIME OF FRAME AND GRATE INSTALLATION.
3. THRU-CURB FRAME LOCATIONS SHALL BE TWENTY-FIVE (25) FEET AWAY FROM ANY P.C. OR P.T. OF CURB RADII.

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE. THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION IS KEPT ON FILE AT THE CITY OF KENT. A COPY MAY BE OBTAINED UPON REQUEST.



		CITY OF KENT ENGINEERING DEPARTMENT	
		THROUGH-CURB INLET INSTALLATION	
DESIGNED <u>COK</u>	SCALE <u>NONE</u>	STANDARD PLAN	
DRAWN <u>COK</u>	DATE <u>12/2019</u>	5-7b	
CHECKED <u>COK</u>	ENGINEER		
APPROVED _____			