




KDCS = KENT DESIGN AND CONSTRUCTION STANDARDS.

NOTES:

1. REDUCED PAVEMENT WIDTH ALLOWED PER SECTION 6.2.C.2.
2. ALL DEPTHS ARE MINIMUM COMPACTED IN-PLACE DIMENSIONS.
3. SOIL STABILIZATION FABRIC MAY BE REQUIRED BY THE ENGINEER; PRIOR TO THE PLACEMENT OF GRAVEL BORROW. WHEN REQUIRED THE CONTRACTOR SHALL PLACE A NON-WOVEN GEOTEXTILE FABRIC OVER THE PREPARED SUBGRADE WITH A MINIMUM 2 FOOT OVERLAP.
4. ASPHALT TEMPERATURE SHALL NOT EXCEED 325° AT THE DISCHARGE PLANT. INITIAL BREAKDOWN ROLLING AND COMPACTIVE REPORT SHALL OCCUR PRIOR TO THE INTERNAL MAT TEMPERATURE REACHING 225°. FINAL COMPACTION DENSITY SHALL BE REACHED PRIOR TO THE INTERNAL MAT TEMPERATURE BEING 185°.
5. THE MAXIMUM COMPACTED THICKNESS OF ANY SINGLE ASPHALT LIFT SHALL MEET THE REQUIREMENTS OF WSDOT STD. SPEC. 5-04.3(9), WITH WEATHER LIMITATIONS OUTLINED IN 5-04.3(1) CONSIDERED.
6. THE FACE OF ALL CURB AND GUTTER ABUTTING ASPHALT LIFTS SHALL RECEIVE A UNIFORM BRUSH APPLIED TACK COAT, CSS OR EQUIVALENT. ALL MEET LINES BETWEEN LIFTS SHALL BE UNIFORM AND VERTICAL. THE MEET LINES SHALL BE CLEAN AND TACK COATED. WHEN SUCCESSFUL LIFTS ARE PLACED A TACK COAT SHALL BE UNIFORMLY APPLIED BY A PROPERLY HEATED AND MAINTAINED MECHANICAL DISTRIBUTOR. LONGITUDINAL PAVEMENT JOINTS SHALL OVERLAP A MINIMUM OF 2 INCHES, TYPICAL.

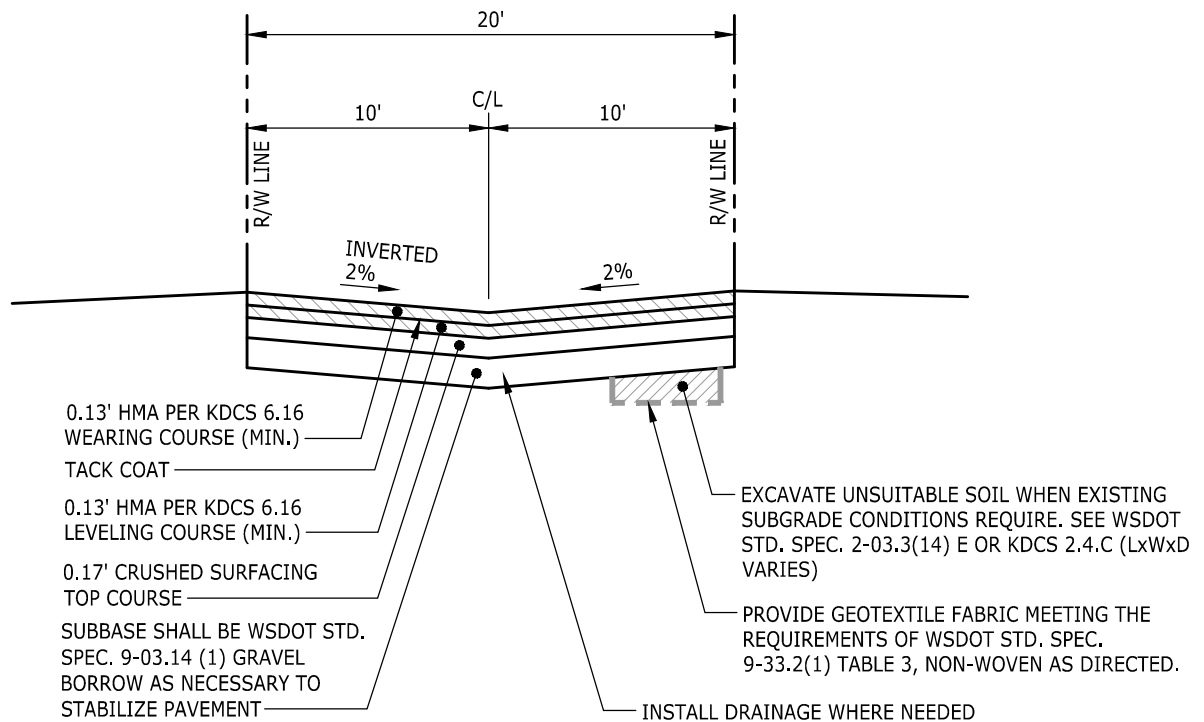

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE. THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION IS KEPT ON FILE AT THE CITY OF KENT. A COPY MAY BE OBTAINED UPON REQUEST.

		CITY OF KENT	
		ENGINEERING DEPARTMENT	
		ALLEY	
DESIGNED <u>COK</u>	SCALE <u>NONE</u>	STANDARD PLAN	
DRAWN <u>COK</u>	DATE <u>12/2019</u>		
CHECKED <u>COK</u>	ENGINEER		
APPROVED		6-14	